



Oil Shale Pyrolysis Modeling

Ramesh Sarathi


28th Oil Shale Symposium
Colorado School of Mines, Golden, CO
October 13-17 2008

Overview

- Background
 - Pyrolysis process
 - Previous studies
- Model Description
- Results
- Conclusions


Background

Pyrolysis: (1) Heat Transfer

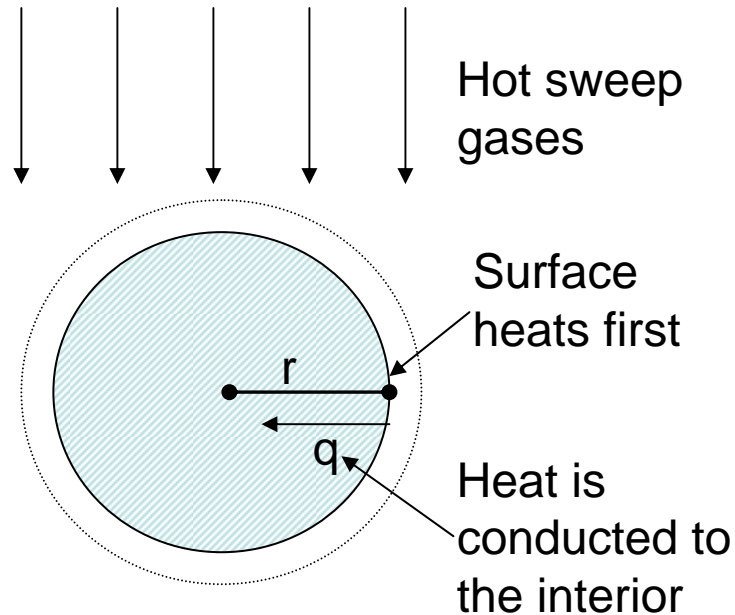

- Hot gases heat the surface of the particle
- Heat is conducted from the surface to the interior


Pyrolysis: (2) Chemical Reaction

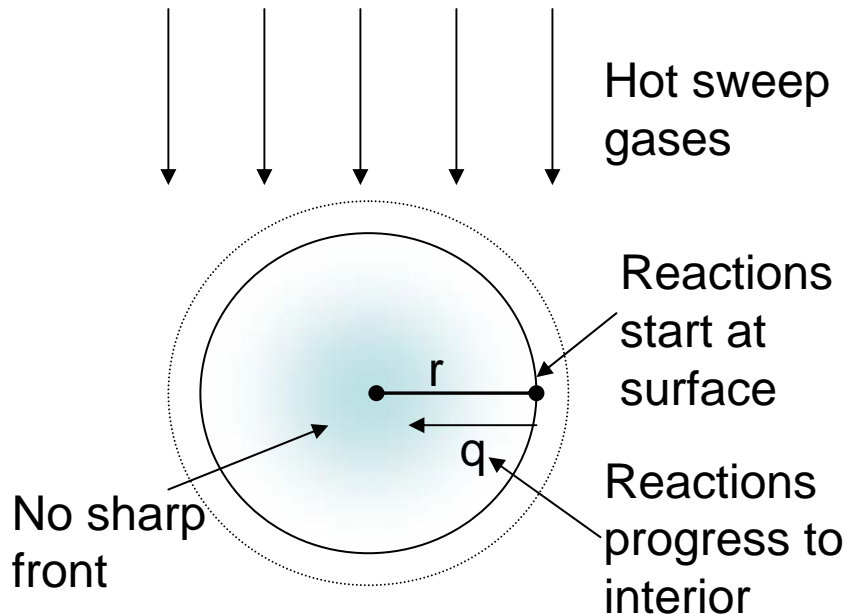

- Temperature rise induces chemical reactions
- Endothermic reactions consume heat
- Rate of temperature rise slows
- Porosity is created as solid reactants form gaseous products

Pyrolysis:

(3) Mass & Momentum Transfer

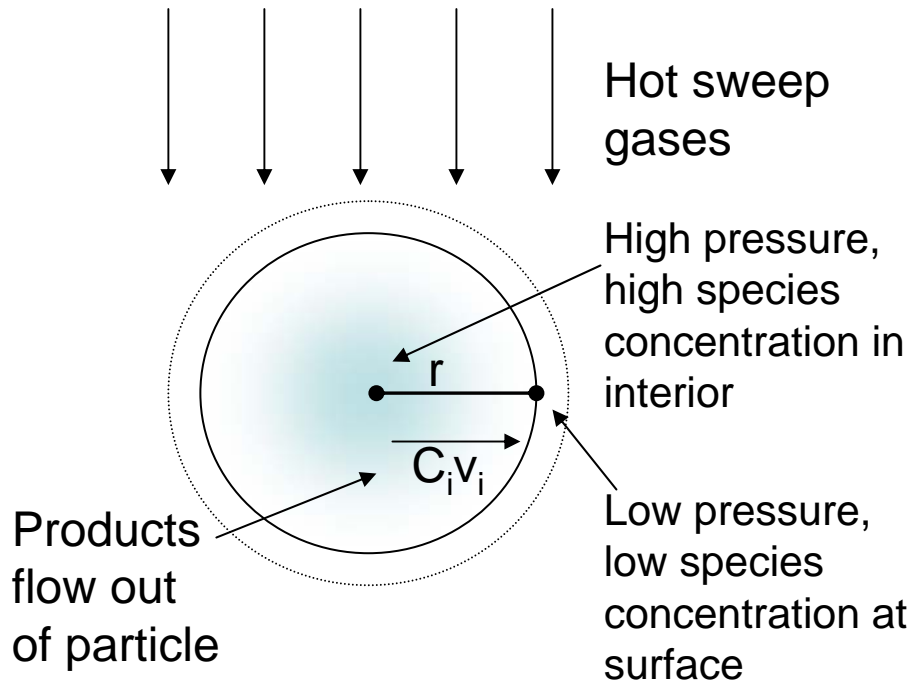

- Momentum Transfer
 - Pressure buildup inside particle causes gas to flow out
- Mass Transfer
 - Concentration gradients cause products to diffuse out of particle
 - Sweep gases diffuse into particle
 - Thermal diffusion causes heavier molecules to diffuse toward cooler regions

Previous Studies

- Experimental Studies

- Kerogen Pyrolysis
 - Campbell et al. [1978]
- Gas Evolution
 - Campbell et al. [1980] (2)
 - Huss & Burnham [1982]
- Oil Coking
 - Campbell et al. [1977]
- Oil Cracking
 - Bissell et al. [1983]
- Char Gasification
 - Burnham [1979] (3)
 - Thomson et al. [1983]
- Carbonate Minerals
 - Campbell [1978]

- Modeling Studies

- Particle
 - Johnson et al. [1975]
 - Campbell et al. [1977]
 - Shih & Sohn [1978]
 - Gregg et al. [1981]
 - Burnham & Braun [1985]
 - Wang & Lee [1986]
- Retort
 - Braun & Chin [1977/1981]
 - Tyner & Hommert [1978]
 - Crowl et al. [1979]
 - Parker & Zhang [2006]


Model Description

*All models are wrong,
some are useful.*

~ George Box


Objective

- Review previous studies
- Develop unified kinetic model
- Validate model with experimental data

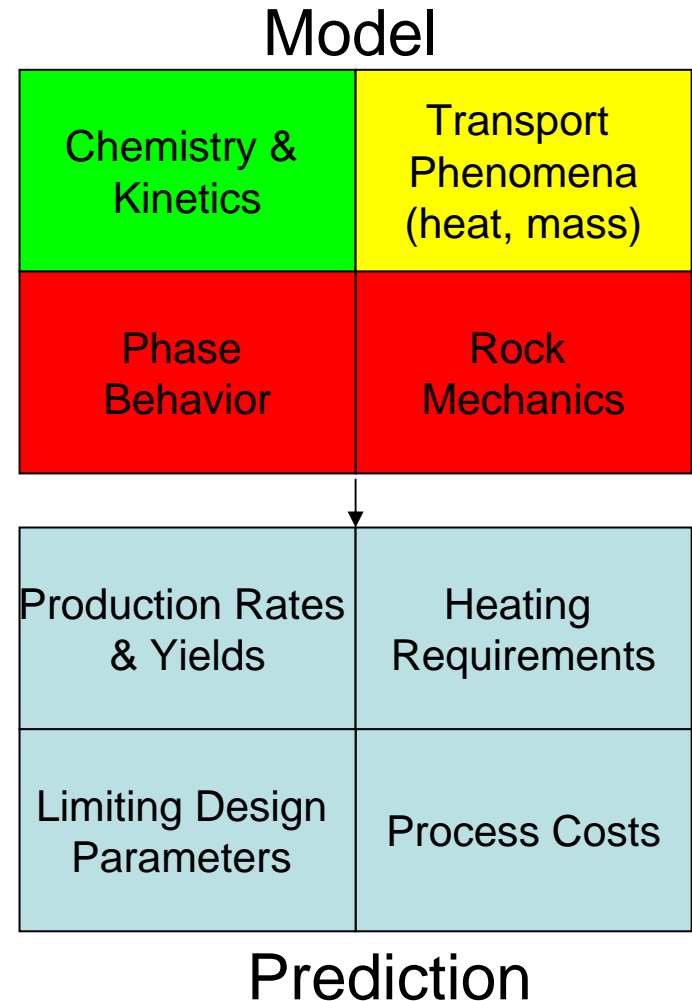


Physical Model

- Physical Model
 - Oil shale is heated in a furnace
 - Constant flow of inert gas sweeps through reactor
 - Volatile products flow out of reactor
 - Assume reactor is spatially uniform
- Chemistry (adapted from LLNL studies)
 - Kerogen pyrolysis
 - Oil Coking, Cracking
 - Char pyrolysis
 - Char gasification, WGS
 - Carbonate decomposition

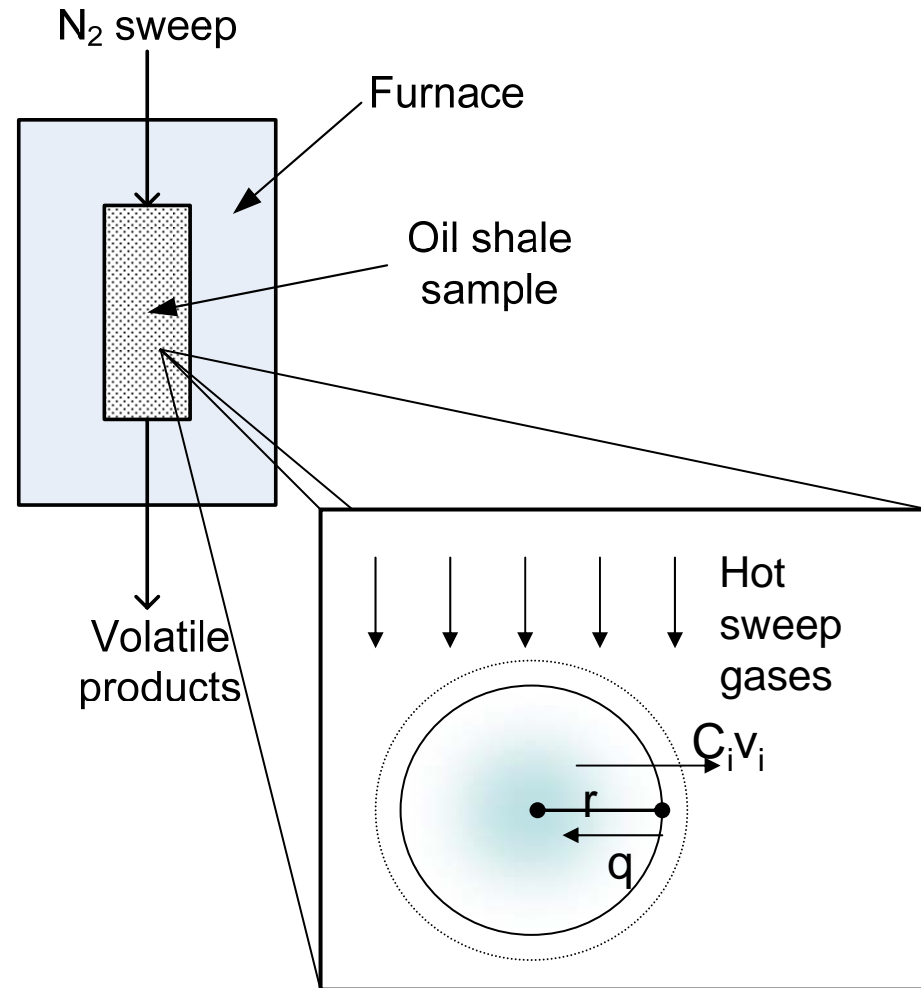

Chemical Reactions

Solid	Gas
Kerogen (5)	Oil vapor (11)
Char (3)	CH ₄
Nahcolite	CH _x
Dawsonite	H ₂
Dolomite	H ₂ O
Calcite	CO
Silicates	CO ₂
	N ₂

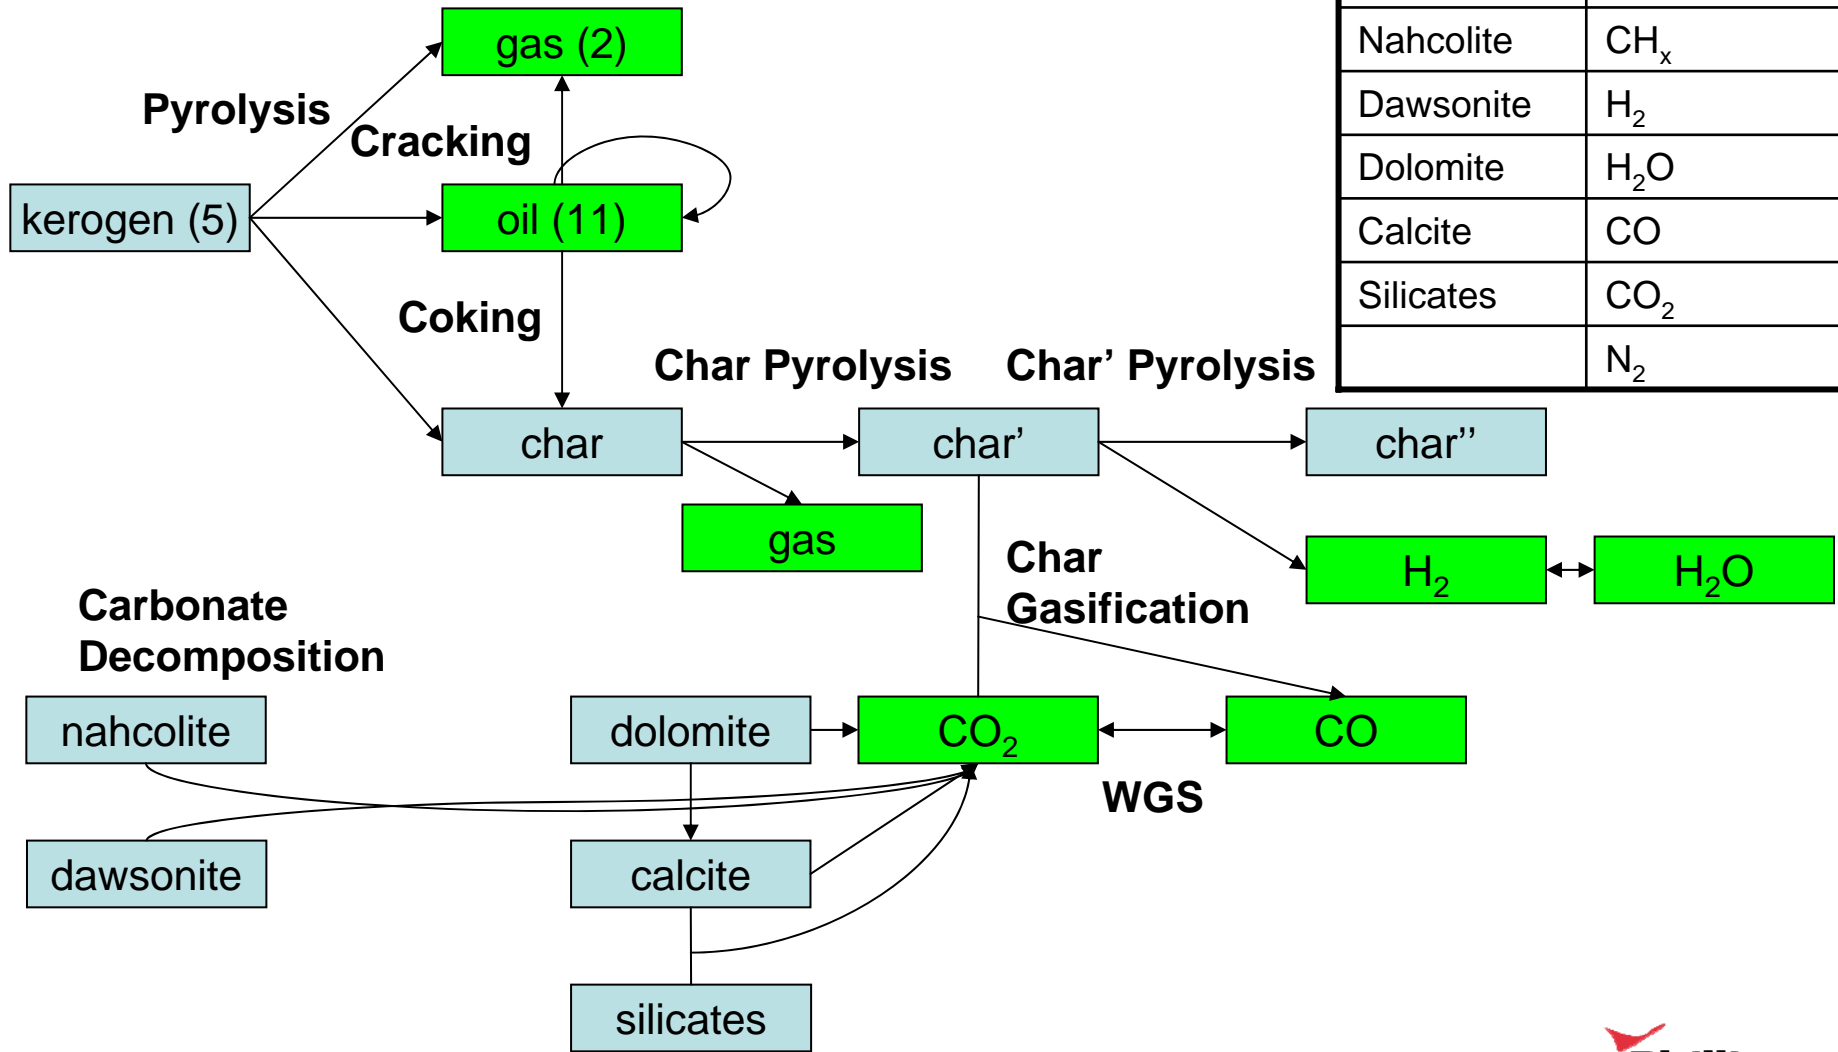

Kinetics

Reaction	Kinetics	Source
Kerogen Pyrolysis (5)	1 st order	Burnham & Braun [1985] Campbell et al. [1978]
Oil Coking (11)	1 st order	Burnham & Braun [1985] Campbell et al. [1977]
Oil Cracking (11)	1 st order	Burnham & Braun [1985] Bissell et al. [1983]
Char Pyrolysis (2)	1 st order Gaussian-distributed E_a	Campbell et al. [1980]
Char Gasification (2)	LHHW	Burnham [1979] (3)*
Water-gas-shift	2 nd order, reversible	Braun & Chin [1981]
Carbonate Decomposition (7)	1 st order LHHW	Campbell [1978]

Conservation Equations

Solid Species Mole Balance

$$\left\{ \begin{array}{l} \text{Accumulation} \\ \text{Rate} \end{array} \right\} = \left\{ \begin{array}{l} \text{Stoichiometry} \\ \text{Matrix} \end{array} \right\} \left\{ \begin{array}{l} \text{Reaction} \\ \text{Rate} \end{array} \right\} \left\{ \begin{array}{l} \text{Volume of} \\ \text{solid phase} \end{array} \right\}$$

$$\frac{dN_{s,i}}{dt} = \sum_j f_{s,i,j} R_j \cdot (1 - \varepsilon) V$$

Gas Species Mole Balance

$$\left\{ \begin{array}{l} \text{Accumulation} \\ \text{Rate} \end{array} \right\} = \left\{ \begin{array}{l} \text{Flow} \\ \text{In} \end{array} \right\} - \left\{ \begin{array}{l} \text{Flow} \\ \text{Out} \end{array} \right\} + \left\{ \begin{array}{l} \text{Generation} \\ \text{from reaction} \end{array} \right\} \quad \left\{ \begin{array}{l} \text{Inlet Molar} \\ \text{Flowrate} \end{array} \right\} = \left\{ \begin{array}{l} \text{Outlet Molar} \\ \text{Flowrate} \end{array} \right\} + \left\{ \begin{array}{l} \text{Generation} \\ \text{from Reaction} \end{array} \right\}$$

$$\frac{dN_{g,i}}{dt} = C_{g,i,0} v_0 - C_{g,i} v + \dot{N}_{g,i}$$

$$F_T = F_{T,0} + \sum_i \dot{N}_{g,i}$$

$$\dot{N}_{g,i} = \sum_j f_{s,i,j} R_{s,j} \cdot (1 - \varepsilon) V + \sum_j f_{g,i,j} R_{g,j} \cdot \varepsilon V \quad \left\{ \begin{array}{l} \text{Inlet Volumetric} \\ \text{Flowrate} \end{array} \right\} = \left\{ \begin{array}{l} \text{Outlet Volumetric} \\ \text{Flowrate} \end{array} \right\} \left\{ \begin{array}{l} \text{Ratio of} \\ \text{Molar Flowrates} \end{array} \right\}$$


$$v = v_0 \left(\frac{F_T}{F_{T,0}} \right) \left(\frac{T}{T_0} \right)$$

Solution Method


- 0D Model
 - Each mole balance equation is an ODE
 - Furnace temperature increases linearly with time
 - Retort sweep gas flow rate determines product residence time
 - Integrate ODE system with MATLAB ODE15s

Results


Oil Production

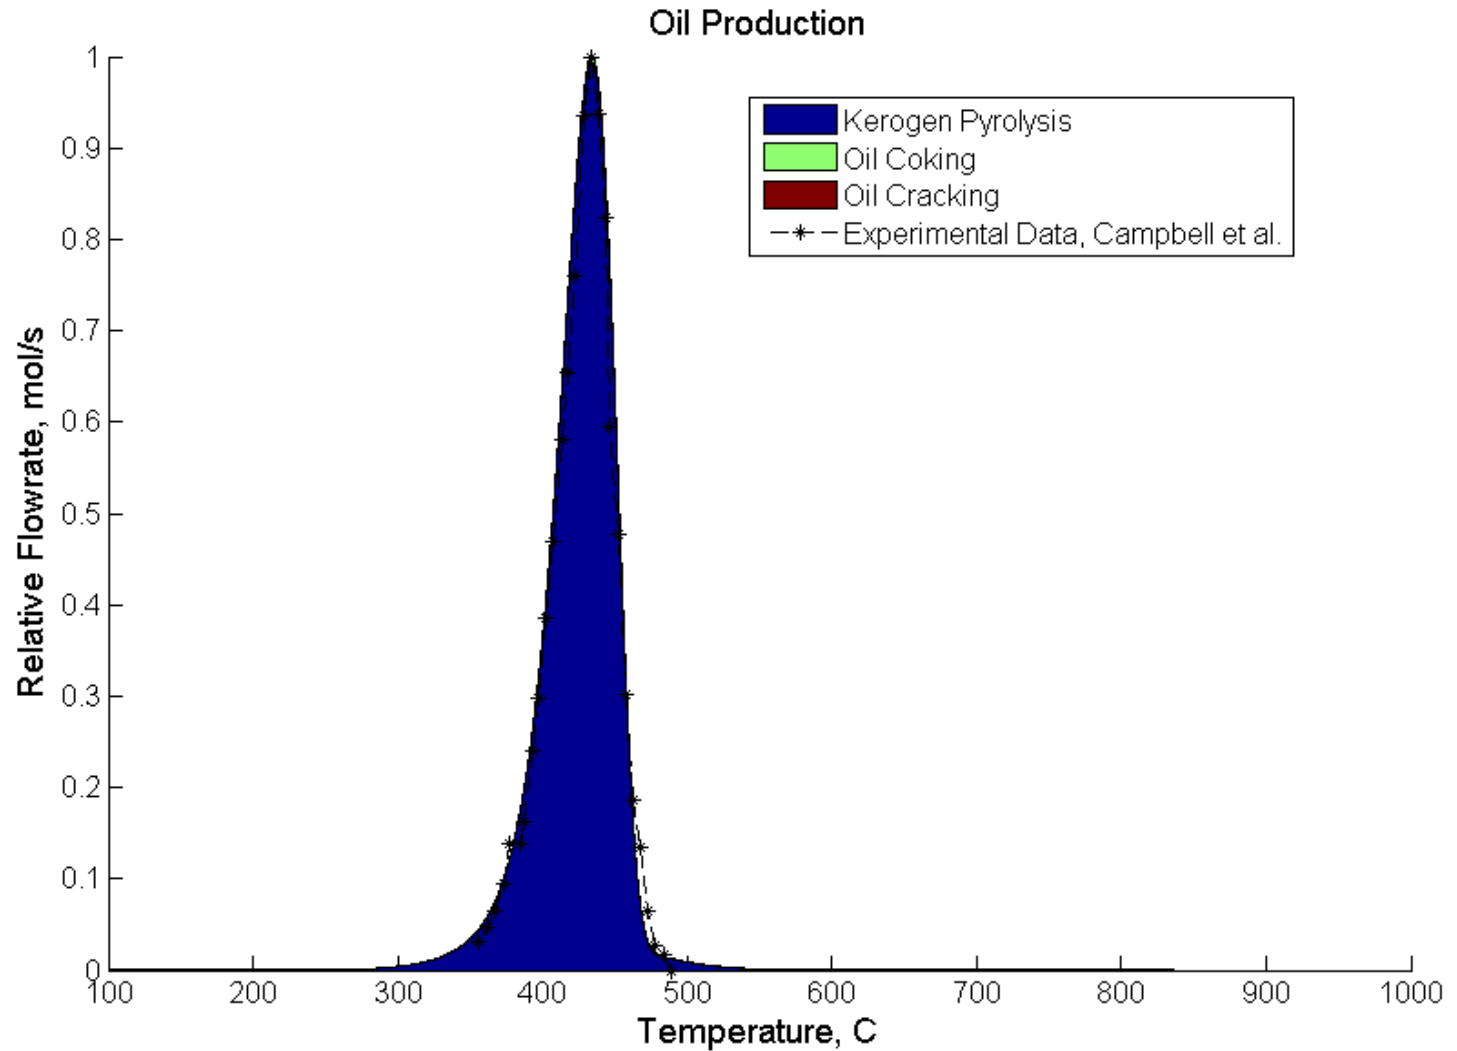


Methane Production

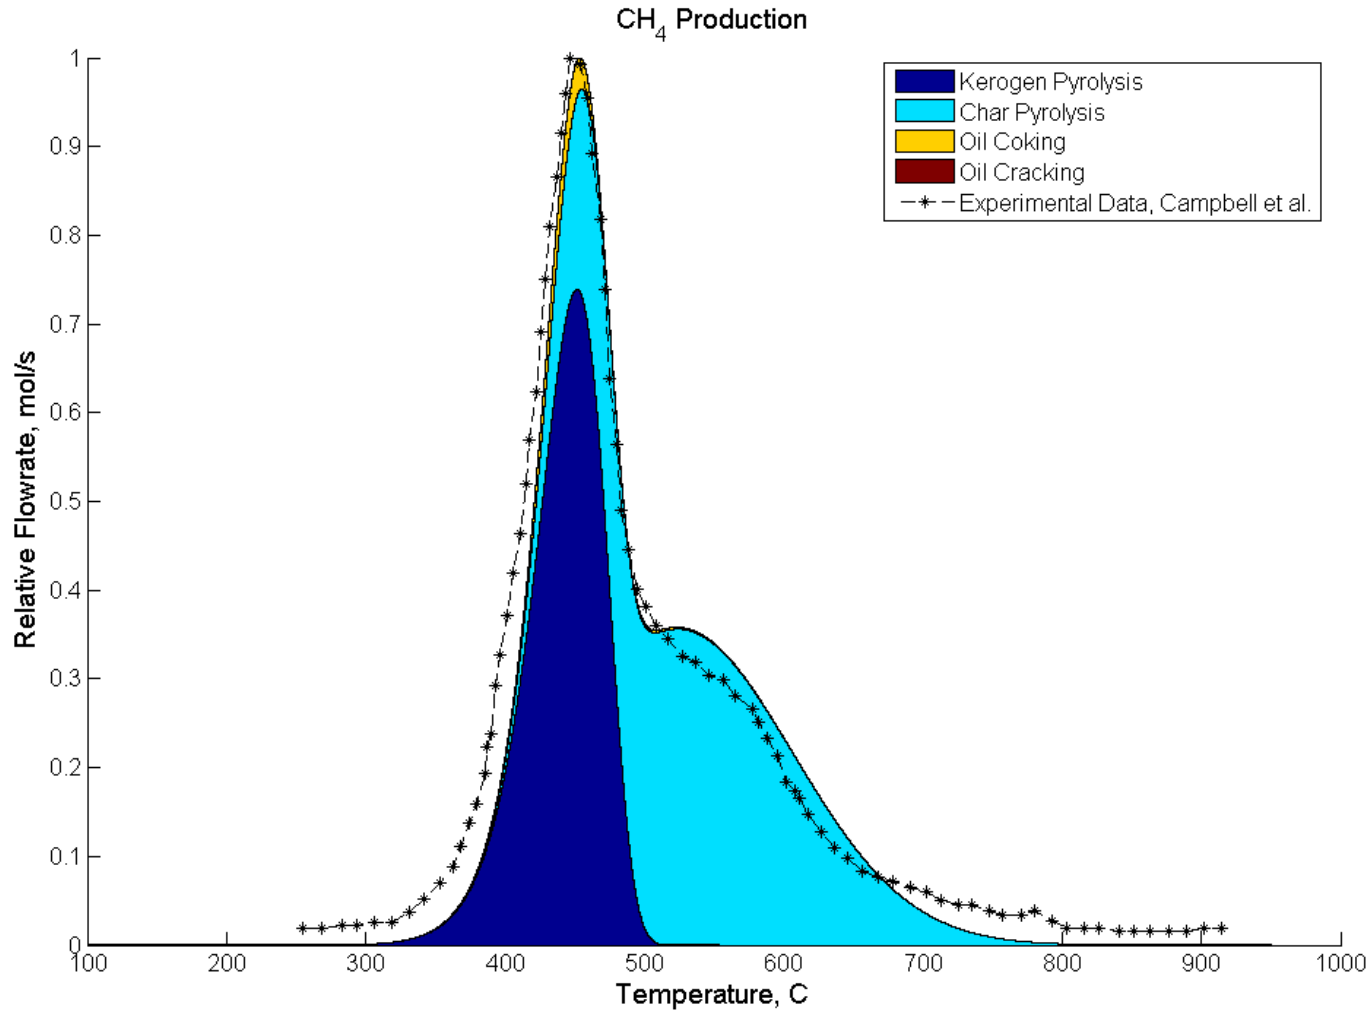

H₂ Production

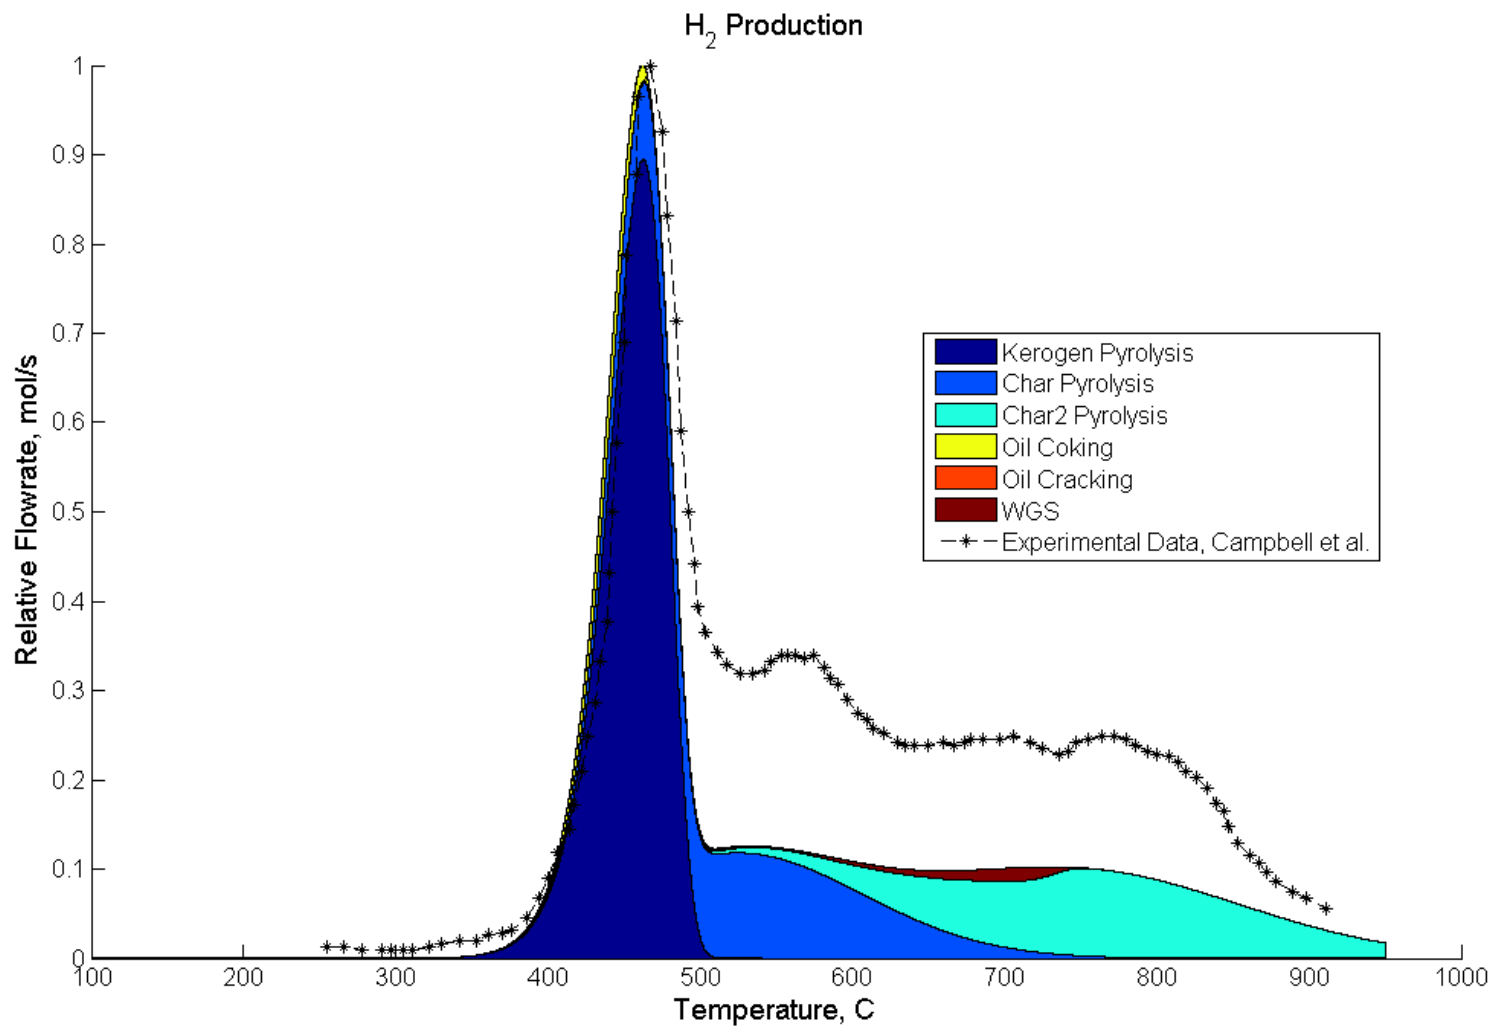

CO₂ Production

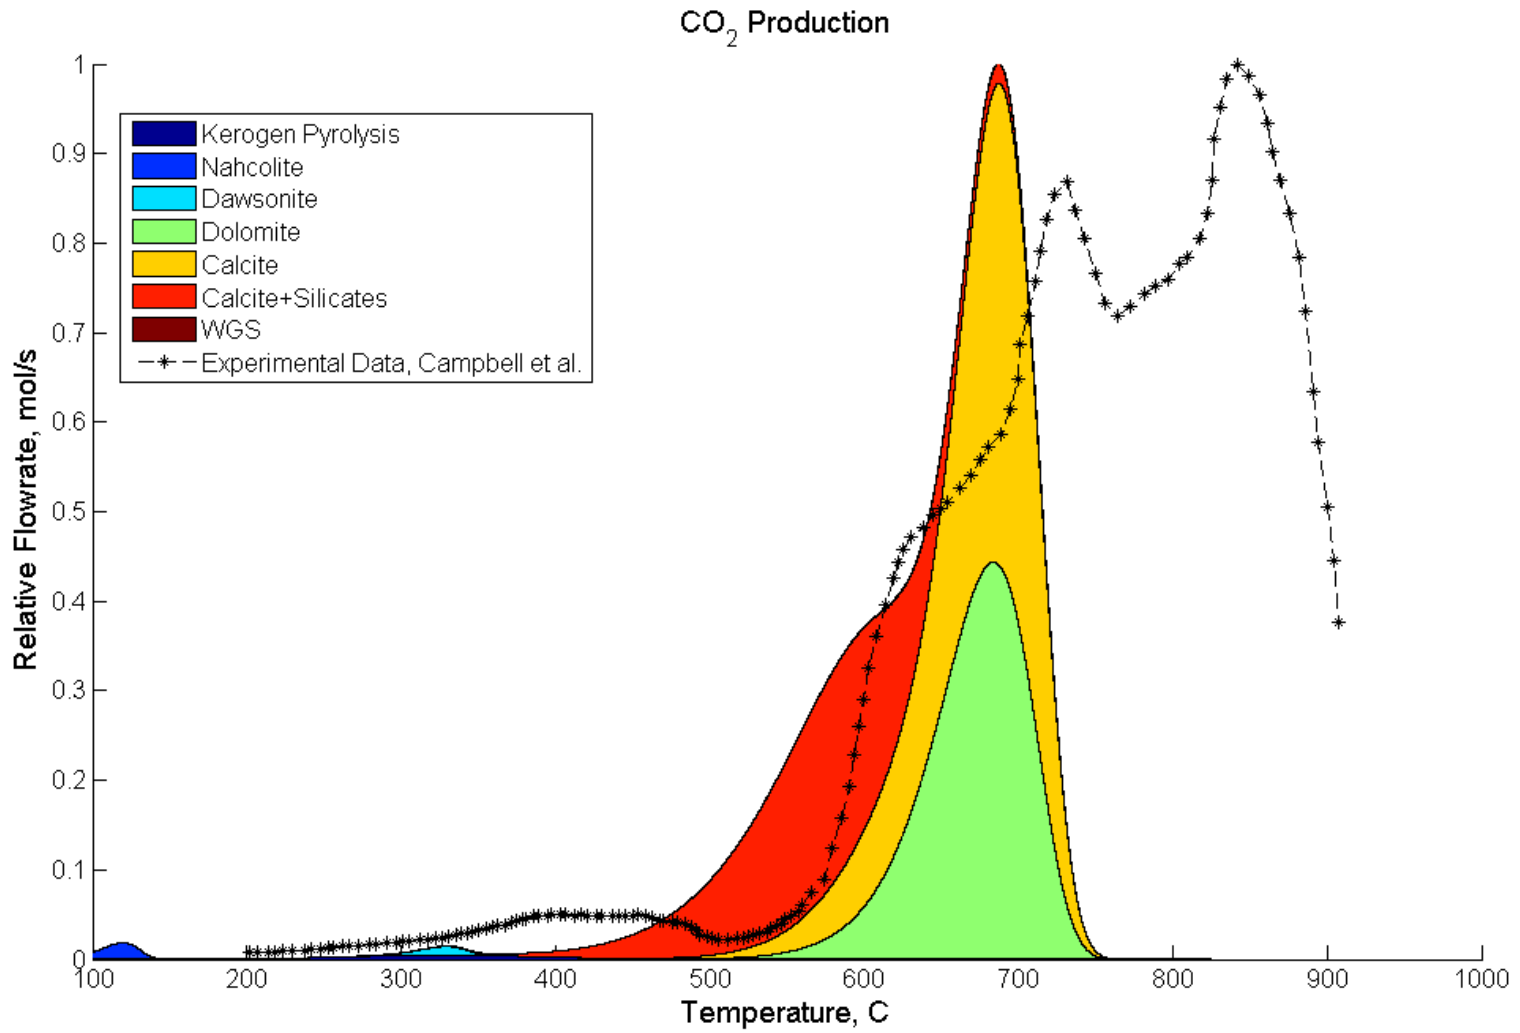

Conclusions

- Kinetic model can reproduce trends in laboratory data
- Next Steps
 - Improve lumped species model for oil composition
 - Perform sensitivity analyses
 - Develop particle model w/ mass and heat transport

Questions?

Conservation Equations: 1D

Solid-phase Mass Balance

$$\{\text{Solid Accumulation}\} = \{\text{Reaction}\}$$

$$\frac{\partial((1-\phi)C_{s,i})}{\partial t} = \dot{R}_{s,i}$$

Gas-phase Mass Balance

$$\{\text{Gas Accumulation}\} = \{\text{Diffusion}\} + \{\text{Convection}\} + \{\text{Reaction}\}$$

$$\frac{\partial(\phi C_{g,i})}{\partial t} = \nabla \cdot \left(D_{i,m} \nabla \frac{C_{g,i}}{C_{g,t}} + \frac{-\kappa}{\mu} \nabla p C_{g,i} \right) + \dot{R}_{g,i}$$

Particle Energy Balance

$$\{\text{Heat Accumulation}\} = \{\text{Conduction}\} + \{\text{Generation by Reaction}\}$$

$$\left(\rho_s c_{p,s} \right) \frac{\partial T}{\partial t} = \nabla \cdot \lambda_s \nabla T - \sum_j^{n_{rxn}} h_{rxn,j} R_j$$